

Technical Data Sheet

CM-3008

CITRONIC
ULTIMA

Warning

CODE: 178.701

- **Hearing damage:**
Citronic loudspeakers are easily capable of generating high sound pressure levels (SPL) sufficient to cause permanent hearing damage to performers, production crew and audience members. Caution should be taken to avoid prolonged exposure to SPL in excess of 90 dB.
- Route cables so that peoples will not trip over them pulling the speaker over.
- Use only stands which are designed to support the weight of the speaker. Do not attempt to place more than one speaker on a stand designed for a single speaker.
- Place the stand always on a flat, level, and stable surface and that the legs do not present a trip hazard.
- To avoid damage to the drivers, never overload the speakers for a long period of time.



Features

- Crossovers optimally designed to give smooth and balanced integration of drivers
- Plywood cabinet
- Top hat fitted for maximum versatility in mixing and matching enclosures
- Steel bar handles fitted as standard
- Rigging Points
- 2×NL4 speaker connector

Technical Specification

Power rms:	250W
Impedance:	8 Ohm
Freq. response:	65Hz-16KHz(-3dB)
Sensitivity:	93dB/1M/W
DC Impedance:	<3%
Connectors:	NL4*2 , +1 -1
Dimensions(W×D×H):	337x336x560mm
Packaging Dimensions(W×D×H):	405x400x620mm
Net Weight:	17Kg
Gross Weight	19Kg

Applications

Nightclubs - Bars - Cinemas - Live Events - High Volume Music Applications

www.citronic.com

N.B. Citronic reserves the right to alter these specifications at any time and for any reason without liability. Errors and Omissions Excepted.

Technical Data Sheet


CM-3008

CITRONIC[®]

ULTIMA


Views

CODE: 178.701

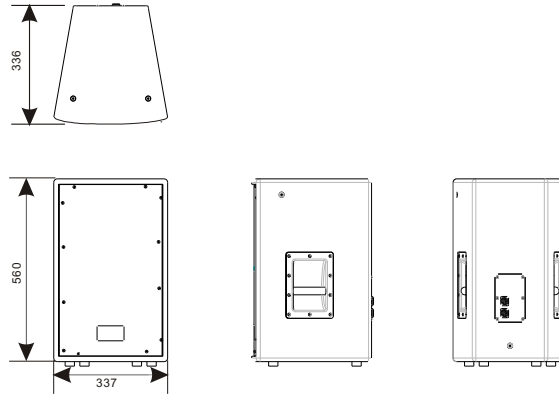

Technical Measurements


Frequency response Magnitude

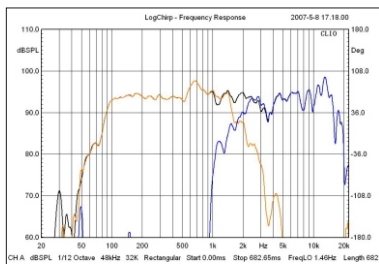


Impedance Magnitude



Distortion Magnitude

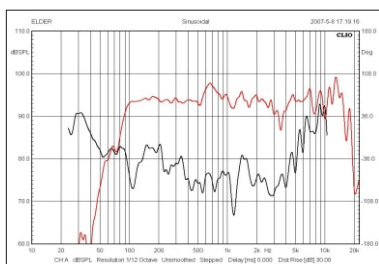

Connection



www.citronic.com

N.B. Citronic reserves the right to alter these specifications at any time and for any reason without liability. Errors and Omissions Excepted.